

LEGEND


- CURB FIRELANE MRK RECOAT
- MEDIAN ISLAND W/ PAVERS
- REPLACE ASPH W/ CONC PAV

- GRATE ADJUSTMENT NOTES:**
- FINAL STORM GRATE MUST ADHERE TO B/CS SPECIFICATION STANDARD STORM SEWER INLETS, SECTION 33 40 03.
 - CLEAN THE TOP SURFACE OF CONCRETE. CONSTRUCT TO THE PROPER NEW ELEVATION USING SALVAGED MATERIAL, PREFABRICATED METAL EXTENSION RINGS, CONCRETE RINGS, OR CLASS A CONCRETE. INSTALL THE GRATE TO CONFORM TO THE PROPOSED NEW SURFACE CONTOUR. INSTALL PREFABRICATED EXTENSION RINGS IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS.

- GENERAL NOTES:**
- SEE MEDIAN AND SECTIONS EXHIBIT FOR MEDIAN DESIGN AND SECTION INFORMATION




QUANTITY ESTIMATE		
ITEM	UNIT	QUANTITY
REMOVE (8") BASE & ASPH PAV	SY	1,500
CONC PVMT (8")	SY	1,500
LANDSCAPE PAVERS	SY	140
CONC CURB (TYII)	LF	220
PROP SIGN AND SUPPORT	EA	2
RELOCATE EXIST STOP SIGN AND SUPPORT	EA	1
REPLACE EXIST SIGN FACE	EA	2
ADJUST STORM GRATE TO MATCH EXIST PAVE GRADE	EA	2
EROSION CONTROL LOGS (12")	LF	52



PROJECT NAME:	BLINN BRYAN CAMPUS 2025 PAVING REPAIRS
PROJECT NUMBER:	13512
PREPARED FOR:	BLINN COLLEGE
DATE:	10/10/2024


PAVING EXHIBIT




BLEYL ENGINEERING
TEXAS FIRM REGISTRATION NO. F-678

1722 BROADMOOR, SUITE 210, BRYAN TEXAS 77802
PHONE 979-268-1125 FAX 979-260-3849
WWW.BLEYLENGINEERING.COM

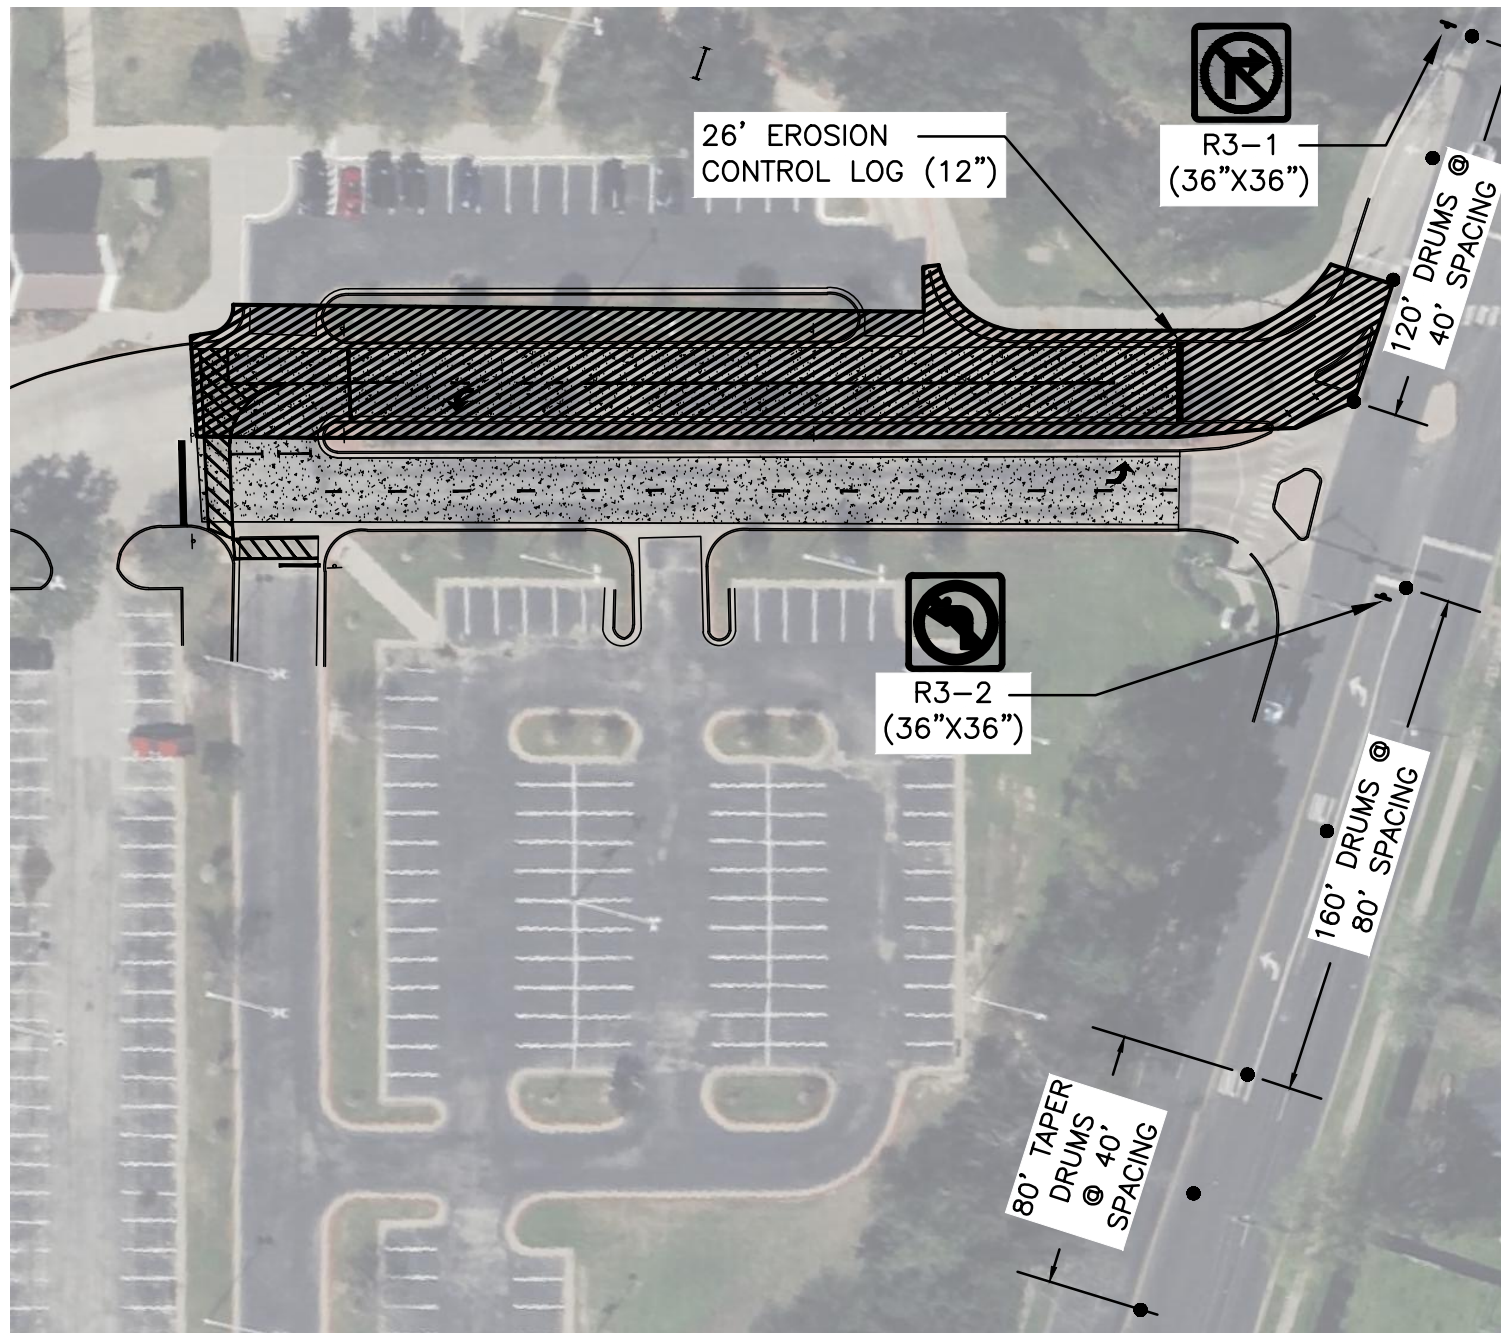


PHASE A

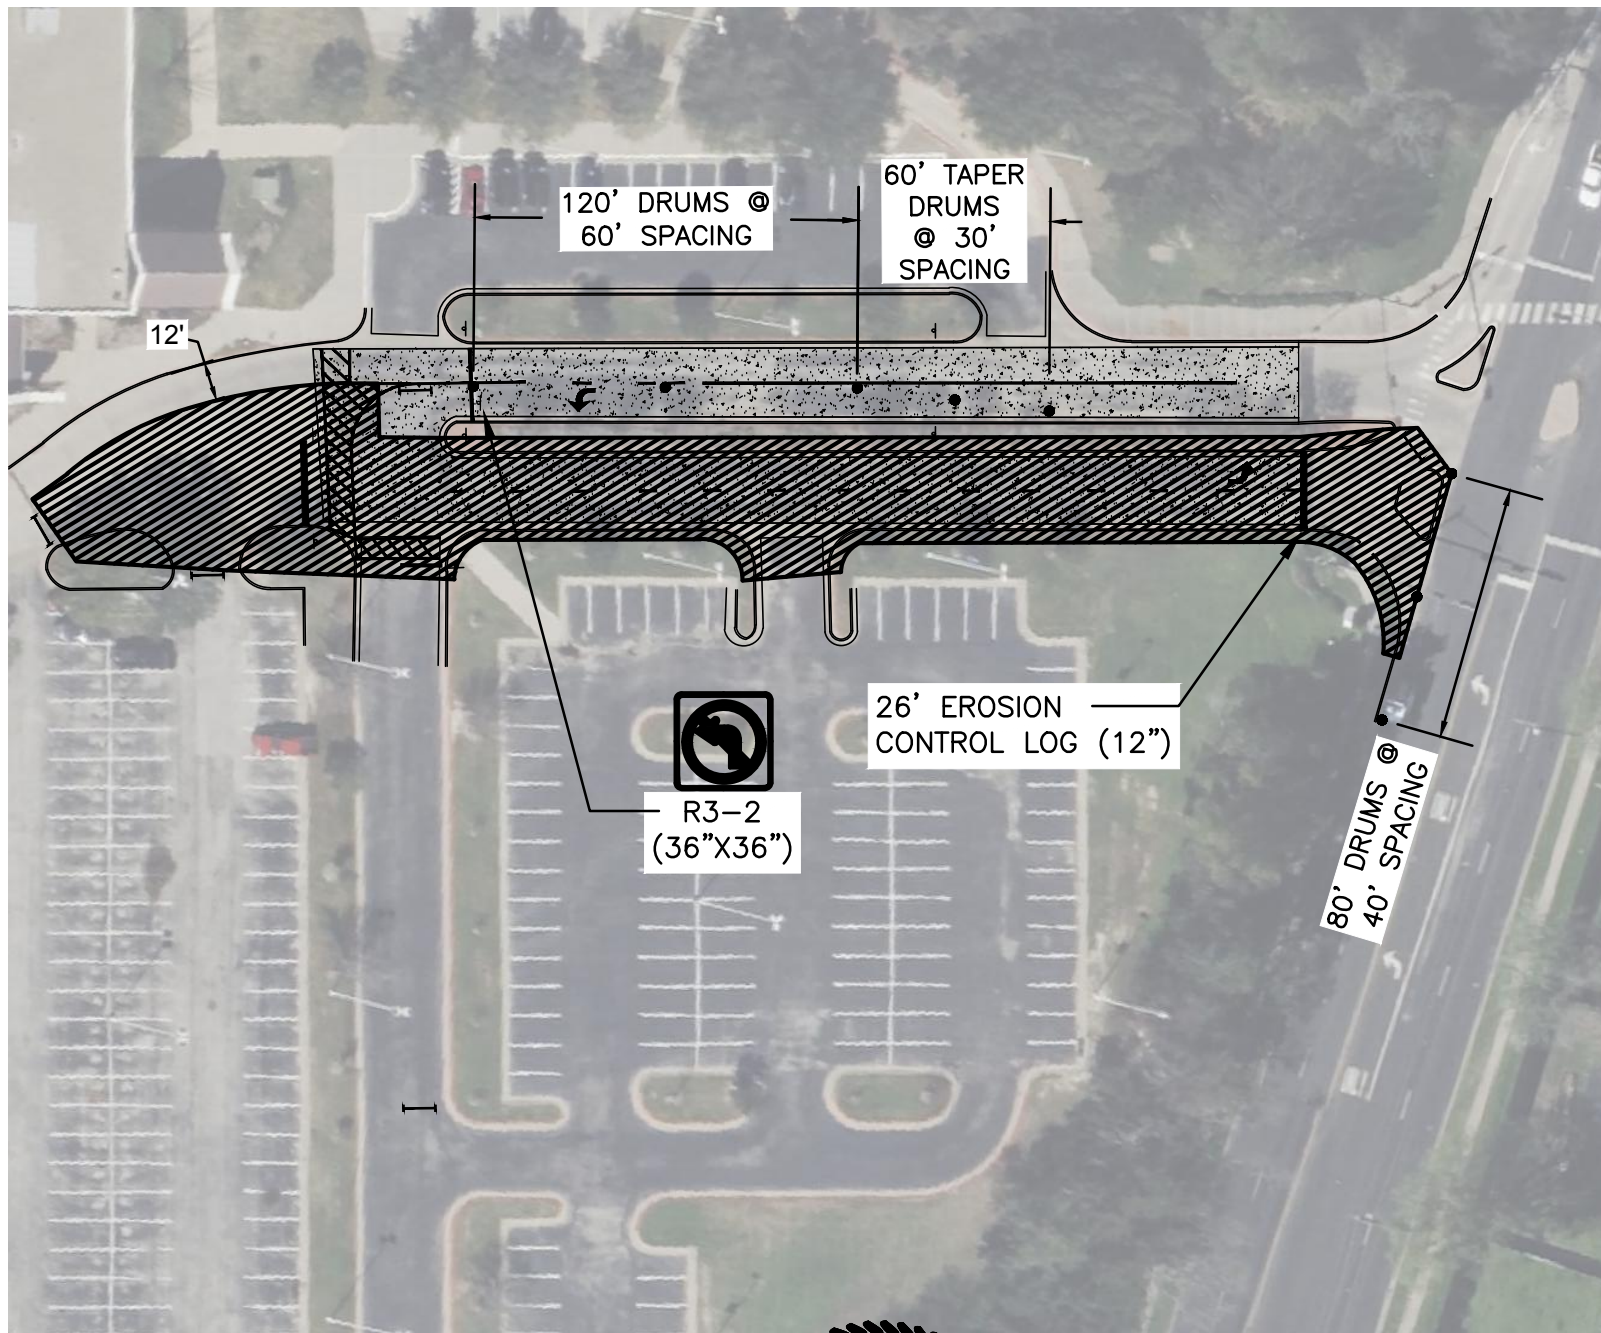


PHASE B




LEGEND

-  TCP BARREL DRUMS
-  TY-III BARRICADE
-  PHASE WORKZONE

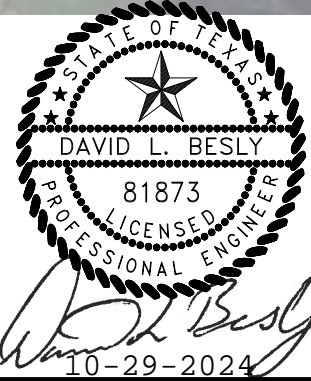


- NOTES:
1. COORDINATE LANE CLOSURES WITH THE CITY OF BRYAN
 2. LANE CLOSURES IN ACCORDANCE WITH TCP(1-4)-18



PROJECT NAME:	BLINN BRYAN CAMPUS 2025 PAVING REPAIRS
PROJECT NUMBER:	13512
PREPARED FOR:	BLINN COLLEGE
DATE:	10/10/2024

TRAFFIC CONTROL PLAN EXHIBIT








BLEYL ENGINEERING
TEXAS FIRM REGISTRATION NO. F-678

1722 BROADMOOR, SUITE 210, BRYAN TEXAS 77802
PHONE 979-268-1125 FAX 979-260-3849
WWW.BLEYLENGINEERING.COM




Signature of David L. Besly
10-29-2024

LEGEND	
	CURB FIRELANE MRK RECOAT
	MEDIAN ISLAND W/ PAVERS
	REPLACE ASPH W/ CONC PAV

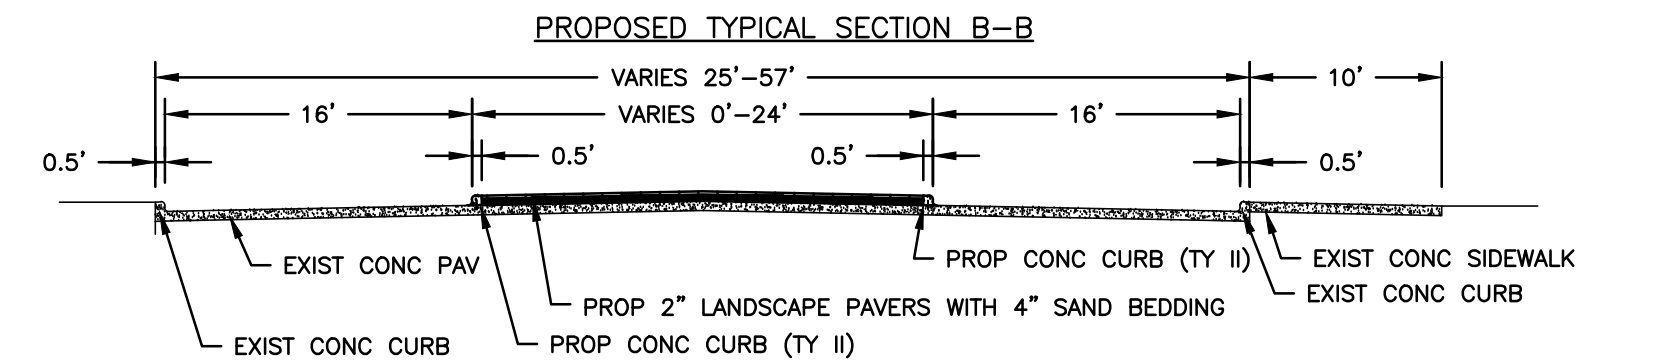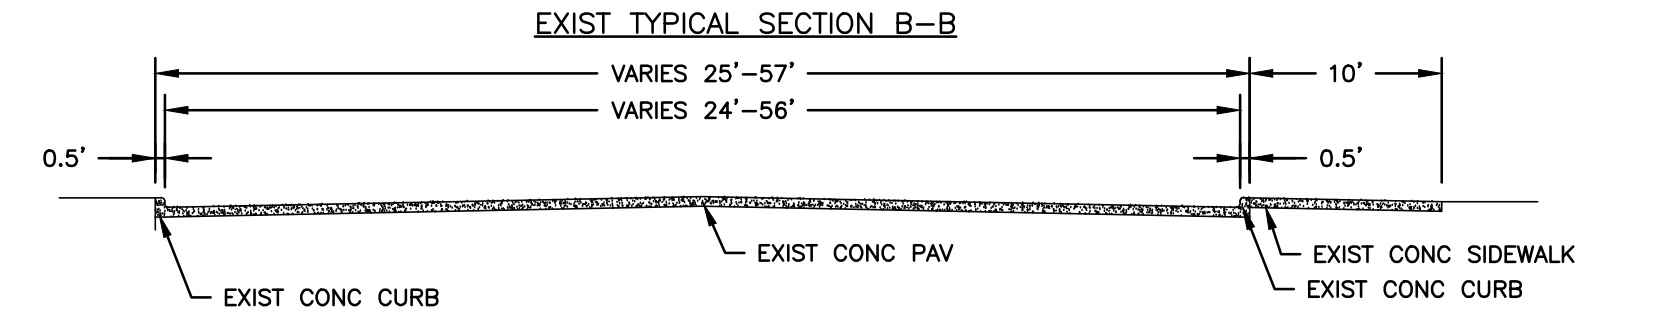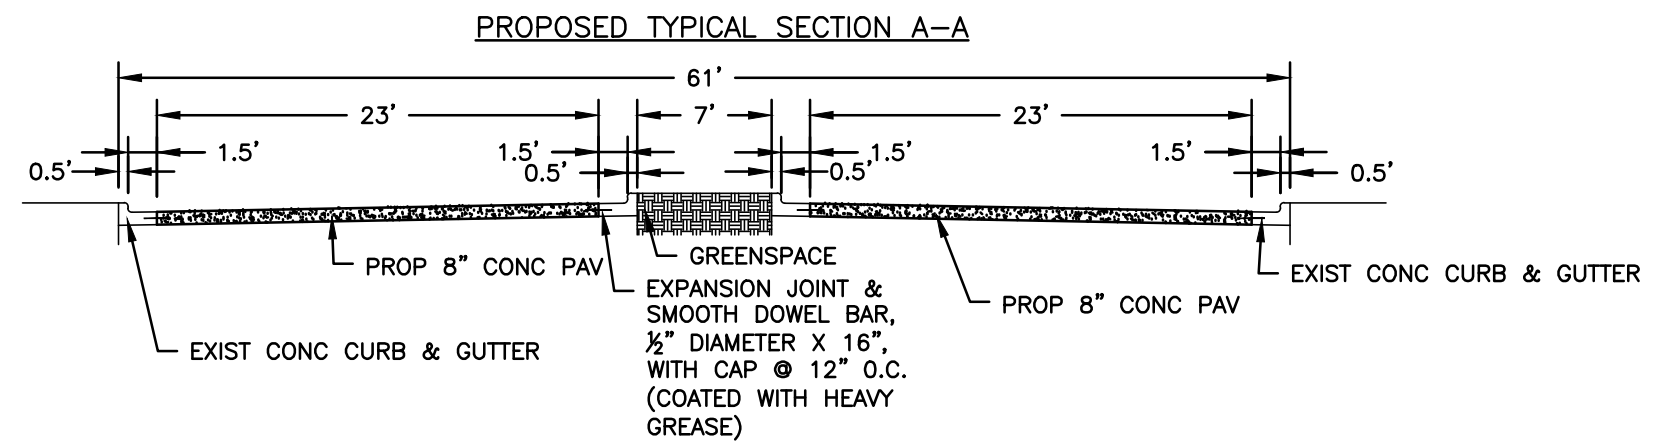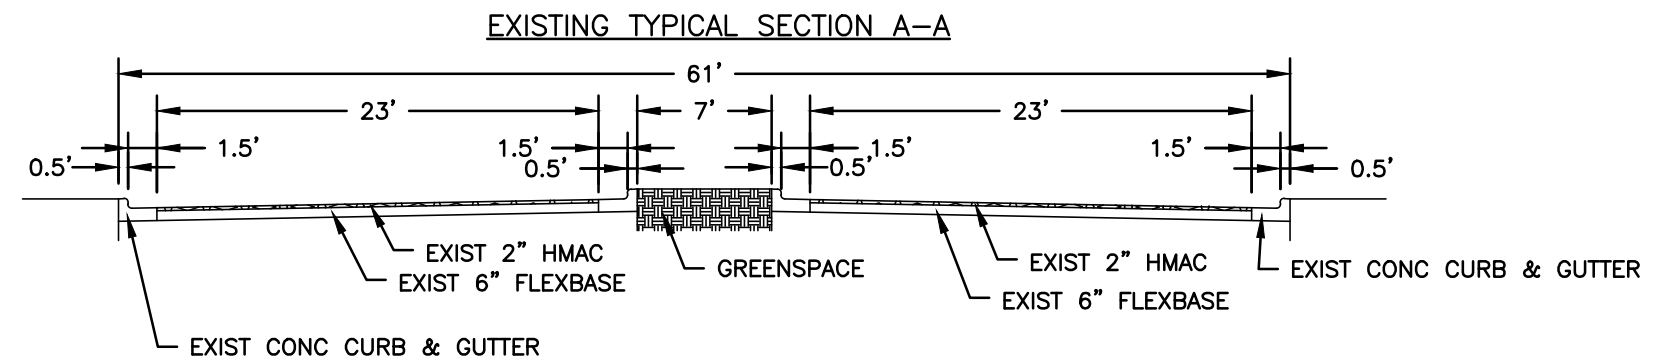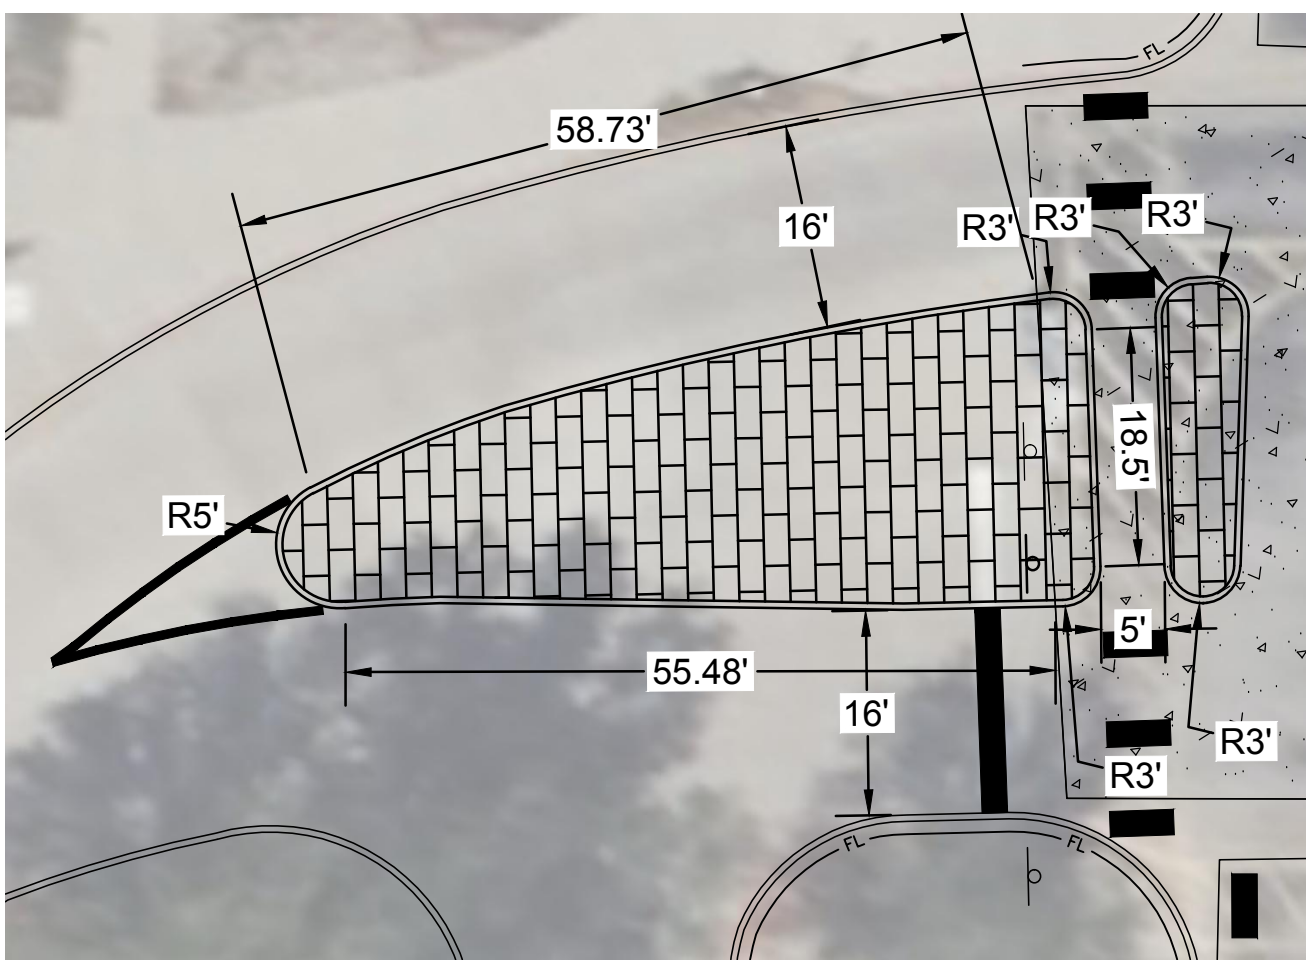


Z:\13500\13512 BLINN 2025 PAVING REPAIRS\2025 FILES\2025 PAVING LOT REPAIRS.DWG



PROJECT NAME:	BLINN BRYAN CAMPUS 2025 PAVING REPAIRS
PROJECT NUMBER:	13512
PREPARED FOR:	BLINN COLLEGE
DATE:	10/10/2024

MEDIAN AND SECTIONS EXHIBIT



BLEYL ENGINEERING
TEXAS FIRM REGISTRATION NO. F-678

1722 BROADMOOR, SUITE 210, BRYAN TEXAS 77802
PHONE 979-268-1125 FAX 979-260-3849
WWW.BLEYLENGINEERING.COM

GENERAL NOTES:

ALL AREAS WHERE EXISTING VEGETATION AND GRASS COVER HAVE BEEN BARED BY CONSTRUCTION SHALL BE ADEQUATELY BLOCK SODDED OR HYDROMULCHED AND WATERED UNTIL GROWTH IS ESTABLISHED. IN DEVELOPED AREAS WHERE GRASS IS PRESENT, BLOCK SOD WILL BE REQUIRED. BARED AREAS SHALL BE SEEDED OR SODDED WITHIN 14 CALENDAR DAYS OF LAST DISTURBANCE.


APPROVED EROSION CONTROL MEASURES MUST BE INSTALLED DURING THE ENTIRE TIME THAT EARTH HAS BEEN BARED BY CONSTRUCTION AND SHALL STAY IN PLACE UNTIL ACCEPTABLE VEGETATIVE GROWTH IS ESTABLISHED AFTER CONSTRUCTION IS COMPLETE AND THEN REMOVED BY CONTRACTOR.

ALL EROSION CONTROL MEASURES SHOULD BE CLEANED OF SILT AFTER EVERY RAIN.

ALL TRAFFIC SIGNALS AND APPURTENANCES, AND ALL PAVEMENT MARKINGS AND MARKERS SHALL BE IN ACCORDANCE WITH TXDOT STANDARDS

REFER TO SPEC 31 17 23.23 (PAVEMENT MARKINGS) FOR ADDITIONAL LOCAL REQUIREMENTS.

28-DAY CONCRETE
STRENGTH=3500 psi.

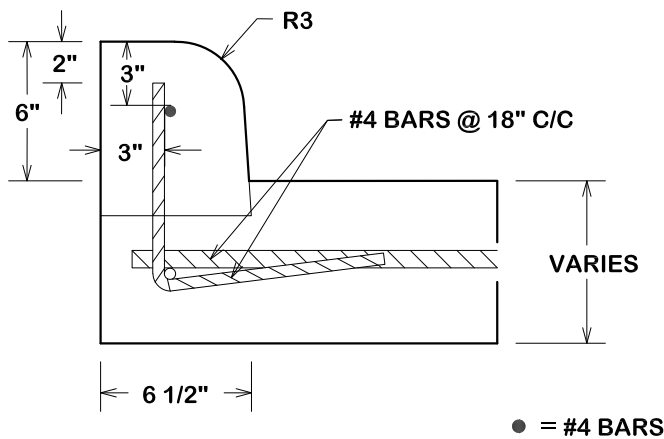

CITY OF BRYAN
The Good Life, Texas Style.

DOWELLED IN CURBS DETAIL

DATE

FEB. 2021


**B/CS UNIFIED
STANDARD DETAIL**

DETAIL NO.

ST1-02




CITY OF COLLEGE STATION

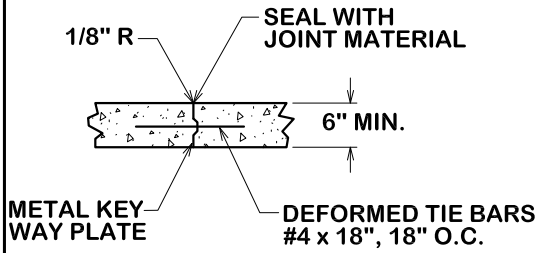


TYPE "D"

LONGITUDINAL JOINT

LONGITUDINAL JOINTS SHALL BE REQUIRED ONLY ON THE CENTERLINE OF THE PAVEMENT & IN INTERSECTIONS AS DETAILED

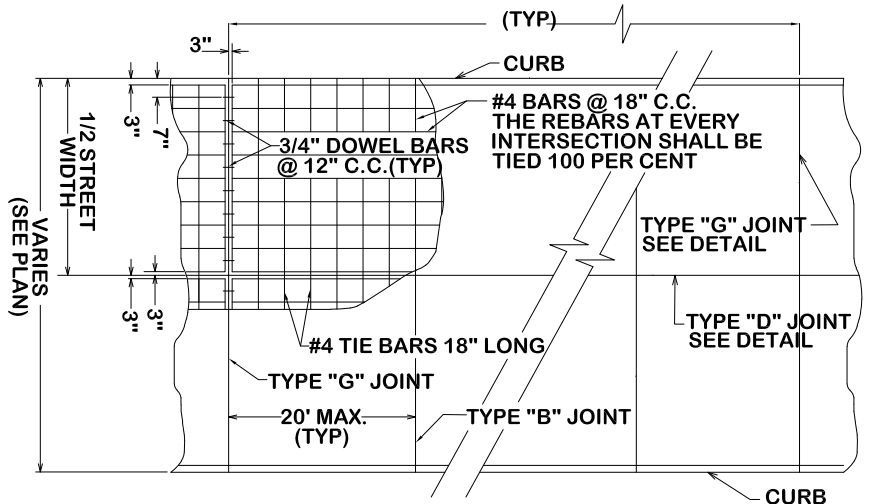

TYPICAL JOINT & REINFORCEMENT LAYOUT FOR CONCRETE PAVEMENT

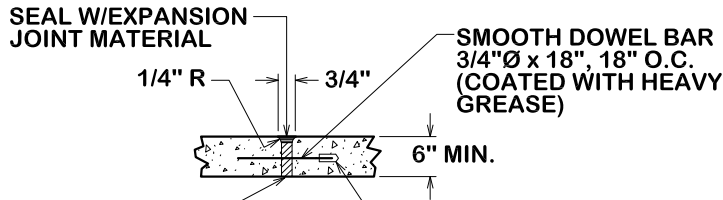


RECYCLED MATERIAL, 3/4" THICK AS MANUFACTURED BY J.D. RUSSELL COMPANY, OR APPROVED EQUAL

3" LONG METAL OR PLASTIC CAP, INSIDE DIAMETER TO BE 1/16" GREATER THAN DIAMETER OF DOWEL BAR. CAP MUST BE LONG ENOUGH TO COVER 2" OF DOWEL AND HAVE STOP SO END OF CAP IS 1" FROM END OF BAR.


TYPE "G"

EXPANSION & CONSTRUCTION JOINT

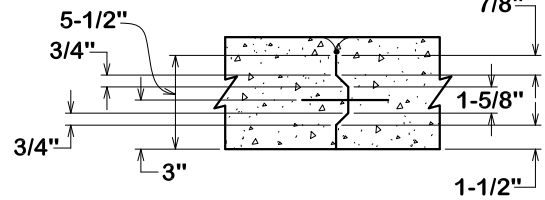


METAL KEYWAY PLATE

NOTE: EXPANSION JOINTS AS SHOWN AND AT EACH RADIUS POINT. CURB EXPANSION JOINTS SHALL BE AT 60' CENTERS. CURB CONTROL JOINTS SHALL BE AT 10' CENTERS.

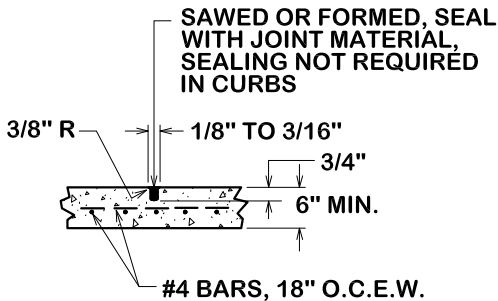

TYPE "B"

CONTRACTION JOINT

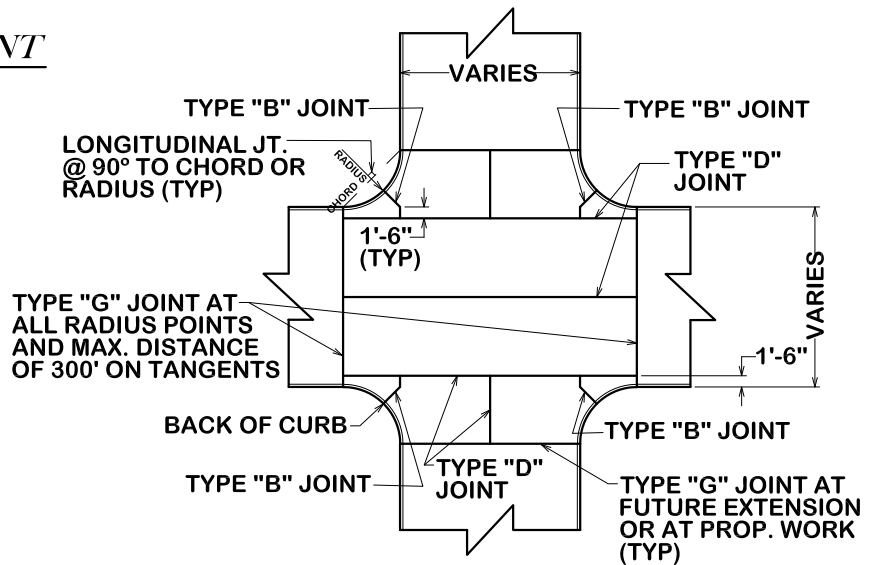

TYPICAL JOINT LAYOUT AT CONCRETE INTERSECTION



CITY OF BRYAN
The Good Life, Texas Style.

CONCRETE PAVEMENT JOINT LAYOUT

DATE
FEB. 2018

**B/CS UNIFIED
STANDARD DETAIL**

DETAIL NO.
ST3-00



CITY OF COLLEGE STATION